


# Munters WM36 & WM54 Series K

## Exhaust Fan

Rugged, efficient airflow engineered for lasting performance.

### Features


- Rigid and durable fiberglass housing
- Powder coated galvanized steel and stainless steel hardware for years of maintenance free performance
- Damper door designed to seal tight and keep the outside out and reduce condensation
- Inlet guard mounts flush with inside of building framing
- Durable polymer UV protected cone with stainless steel hardware for durability and easy installation
- Munters Drive available on WM54 models, high performance and variable speed for a great minimum ventilation option

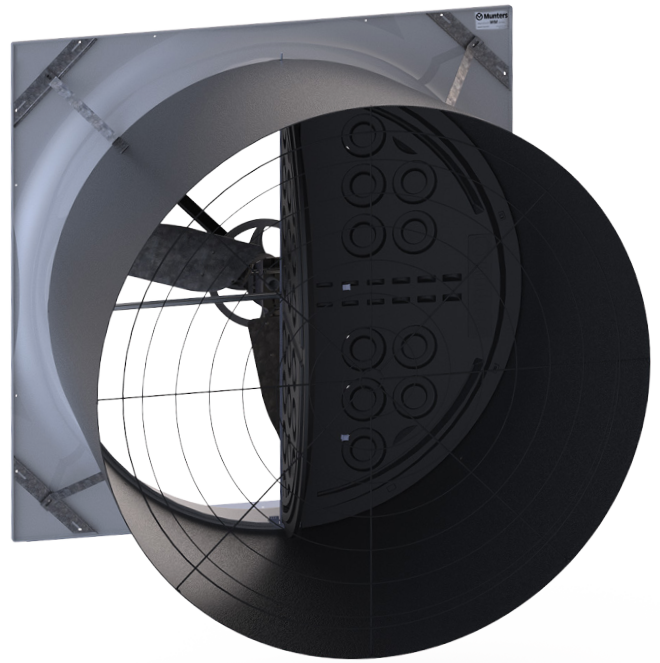

WM54 Series K

The Munters WM Fan Line has been one of the bestselling and reliable fans Munters has offered in years. Since its release in 2016 Munters has refined the product with several upgrades, while keeping the price nearly the same. New features include powder coated galvanized motor mount strut and brackets, stainless steel hardware, upgraded motor, and other improvements to increase durability.


The WM Series K gives you a great combination of corrosion resistance, durability and performance; all at an economical price point. The WM54 is also available with the Munters Drive motor offering variable speed and high performance.

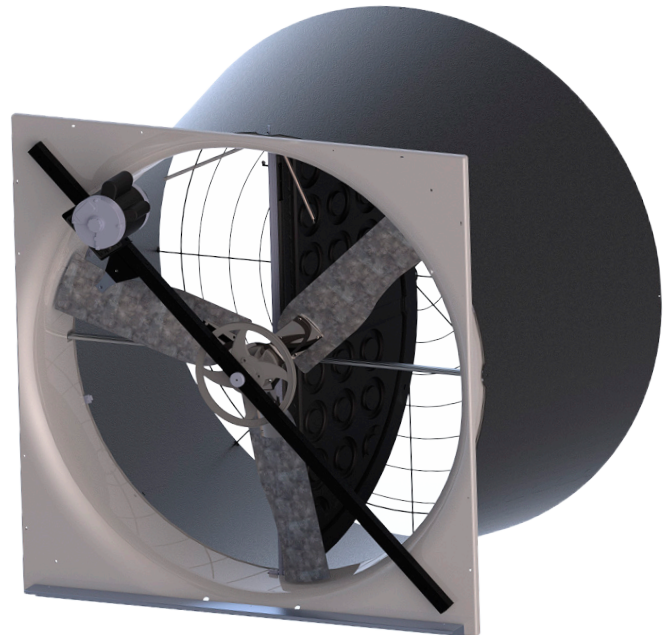

# Munters WM36 & WM54 Series K

## Product Type

### Dimensions

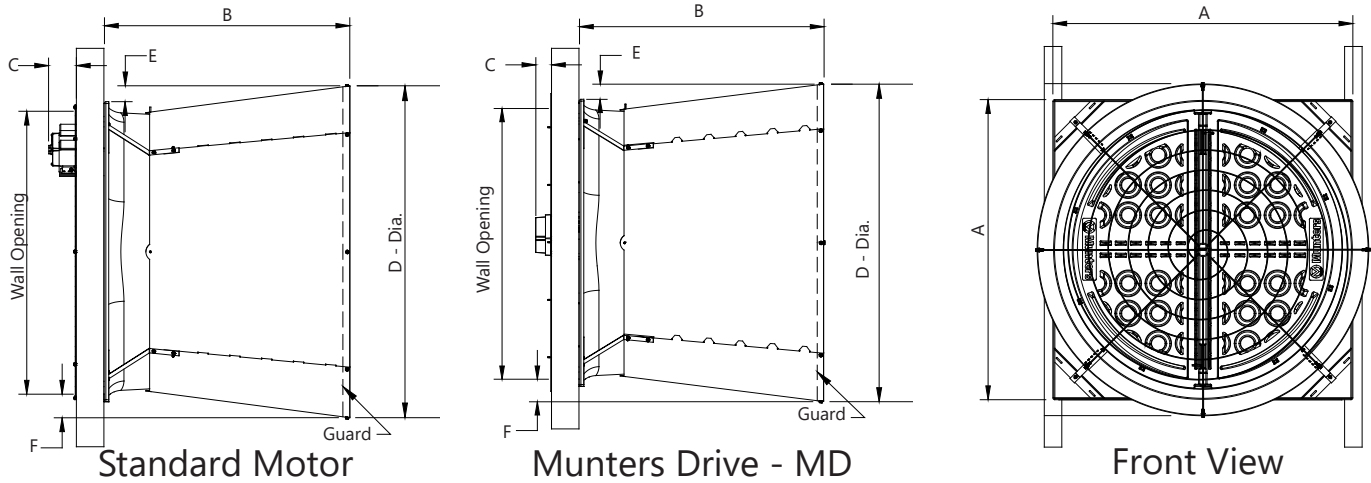

	A	B	C	D	E	F	Wall Opening
WM36K	48"W x 48"H	40"	6½"	48⅜"	1¾"	1¾"	44½"W x 44½"H
WM54K	60"W x 60"H	49"	5⅙"	66⅝" *	3⅞"	43/4"	56½"W x 56½"H
WM54DK - HO	60"W x 60"H	49"	3⅞"	66⅝" *	3⅞"	43/4"	56½"W x 56½"H

### Performance

	Prop Dia	Prop RPM	0.0" SP		0.05" SP		0.10" SP		0.15" SP		0.20" SP		AFR	Lab Test
			CFM	CFM/Watt	CFM	CFM/Watt	CFM	CFM/Watt	CFM	CFM/Watt	CFM	CFM/Watt		
<b>WM367K1CB</b> Single Phase, .75hp, 230V	36"	987	12,400	21.5	11,800	19.5	11,200	17.5	10,500	15.2	9,900	13.6	0.84	20280-01 <sup>◊</sup>
<b>WM5415K1CB</b> Single Phase, 1.5hp, 230V	54"	564	32,500	24.1	30,900	21.8	29,200	19.5	27,200	17.7	25,100	15.5	0.81	15182*
<b>WM54DK21CB-HO</b> Single Phase, 230V Munters Drive	54"	600	34,200	23.3	32,800	20.9	31,200	18.9	29,500	16.9	27,700	15.1	0.84	16950*

<sup>◊</sup> Tested in accordance with AMCA Standard 210

\* Certified Bess Lab Test